


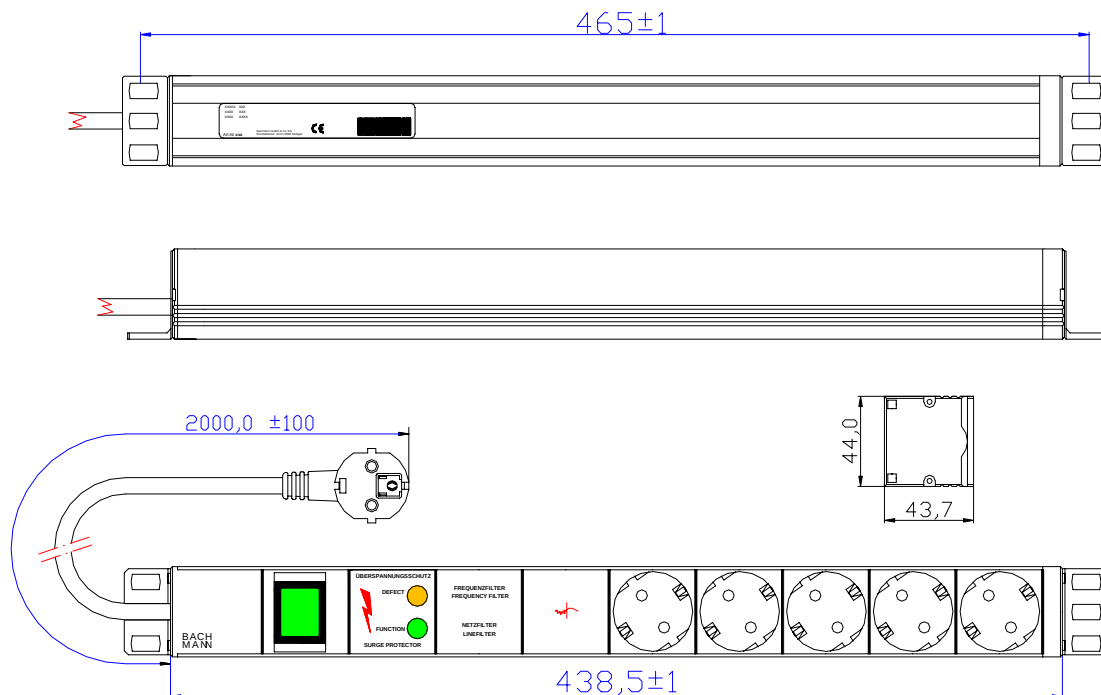

5 Schutzkontakt – Steckdosen mit Schalter und Überspannungsschutz und Filter <u>Steckdosen:</u> - nach DIN 49 440, geprüft nach: VDE0620-1; 2-polig mit Schutzkontakt; 16A/3680W, AC250V, IP20, - Farbe RAL7035, um 35° gedreht; <u>Anschluss:</u> - nicht wiederanschließbar; Endstücke genietet, Innenverdrahtung ohne Euroklemme 2,0m H05VV-F 3G1,5mm² grau mit Schutzkontaktwinkelstecker <u>Profil:</u> 1HE, ALU, eloxiert; <u>Kunststoff:</u> - RAL7035, PA6 GF 30 V1, Glühdraht-Prüfung bis 850°C; <u>Transientenschutz:</u> - Kurzschlussfestigkeit 6,5kA, - Schutzpegel Up 1,5kV - Prüfspannung Uoc 5kV - Uc 255V; 50Hz - optische Funktions- und Ausfallanzeige <u>Netz- und Frequenzfilter:</u> - filtert kleinste Störungen (30MHz) - Eckfrequenz 400Hz, Dämpfung 20dB pro Dekade <u>Schalter:</u> 2-polig, beleuchtet, grün - versenkt <u>Haltewinkel:</u> - Stahlblech - Montage in 90° - Schritten möglich; <u>Lieferform:</u> - Bachmann Polybeutel - mit Bachmann Art.-Nr. und Barcode 13 <u>Lieferumfang:</u> 1 x Steckdosenleiste 2 x 19" Befestigungswinkel (Lose beigelegt)	5 German type earth contact - sockets with switch and overvoltage protection and filter <u>Sockets:</u> - DIN 49 440, examined: VDE0620-1; 2-pole with earthing contact; 16A/3680W, AC250V, IP20, - colour RAL7035, 35° turned; <u>Connection:</u> - non rewirable, Endcaps riveted, inside wiring without euro terminal 2,0m H05VV-F 3G1,5mm² with German type earth contact plug <u>Profile:</u> 1HE, ALU, anodized <u>Plastic material:</u> - RAL7035, PA6 GF 30 V1, Glow wire resistant up to 850° C <u>Transient protection:</u> - short circuit protect. 6,5kA, - protection level Up 1,5kV - test voltage Uoc 5kV - Uc 255V; 50Hz - optic signal for function / defect <u>Line surge and frequency filter:</u> - filters small interferences (30 MHz) - nominal frequency 400Hz, attenuation 20dB per decade <u>Switch:</u> 2-poles, illuminated , green, - Countersunk <u>Holding flanges :</u> - Steel sheet - For fixing in 4 positions each 90° <u>Packing:</u> - polybag with Bachmann print - With Bachmann Item no. and bar code 13 <u>Extent of delivery:</u> 1 x Socket outlet 2 x 19" mounting metal flanges (Loose)
---	--